



Presjek C - C

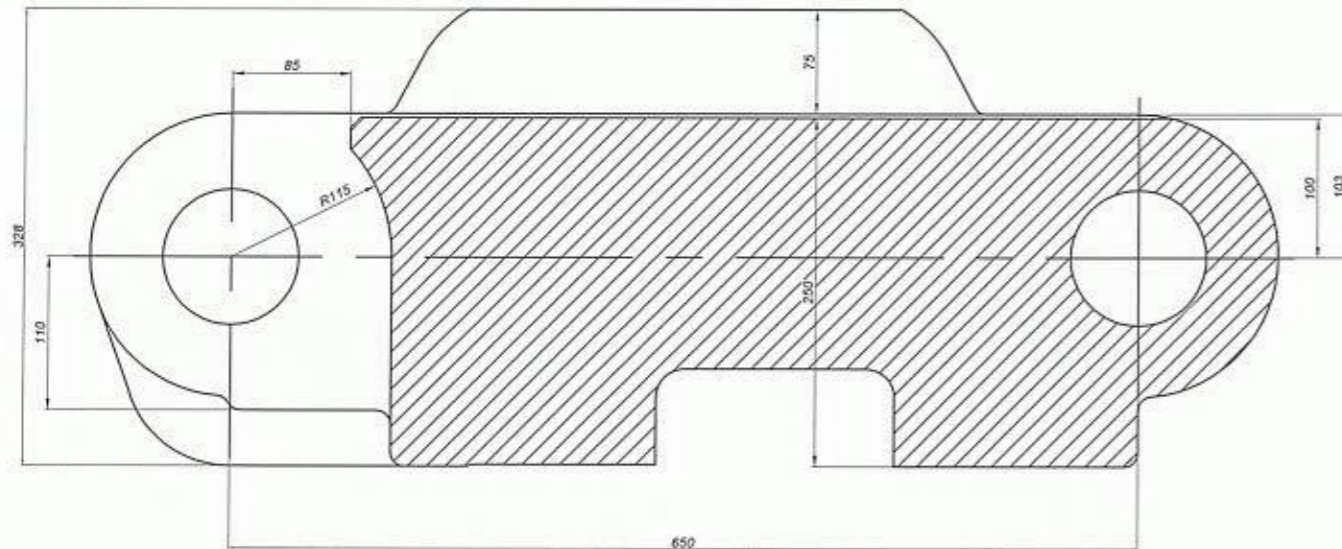

Presjek F - F

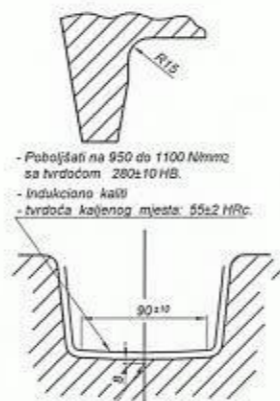


- Pobojšani na 950 do 1100 N/mm² sa tvrdoćom 280±10 HB.
 - Indukciono kalni
 - tvrdoća kalenog mesta: 55±2 HRC

- indukciono kalni na dubini 8 mm na kompletnoj dužini papuče od 650 mm.

Presjek E - E



Presjek E - E (M-1.5)

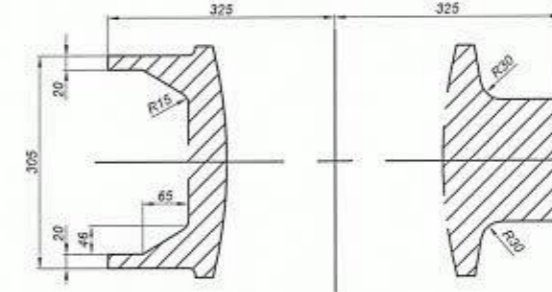

Napomena	Standard	Razmjeri	Kom. 36/1	Masa 225 kg
			Materijal	ČL.4732.4.
		Datum	Ime	Naziv
		Projek.		ČLANAK (SEGMENT) PAPUČE
		Obrač.		
		Kontr.	20.12.11 R.Hankić	Mjesto ugradnje
		Odobr.	E.Ibričić	papuče bagera SRs (H) 401
			Rudnik	Oznaka
			SIKULJE	530.746.400.003
				Kat. broj 533
St.i.	Izmjena	Datum	Ime	List
				1
				Uk U
				Zam.j.za 551-321-28